

Standard Cable Ties

Cable Ties

Tork standard cable ties are produced from Polyamide 6.6 material, which is known as the most durable of plastics. It has high strength and hardness thanks to its semi-crystalline structure. These structural features make Tork standard cable ties the most suitable material to use under loads due to their very high bending and tensile strength and low friction coefficient.

Black-colored Tork cable ties provide excellent protection against sunlight with UV resistance in outdoor applications with the carbon black additive inside

Certifications

Reach, Rohs, Halogen free,


- Only high quality plastic that can be recycled in nature is used
- Wide variety of materials, sizes and colors
- High tensile strength with low application force
- Serrated inner surface to grip the application area more tightly
- Edge surface slope for easy application
- Easy application manually or with apparatus

Technical Specifications

- Raw material: Polyamide 6.6
- Moisture Absorption: 2.7% (50% relative humidity)
- Working temperature: -40 ° C + 85 ° C
- Application temperature: -10 ° C + 60 ° C
- Combustion degree: UL 94 class V2
- Halogen free: Yes

Application Areas

- Electricity Industry
- Industrial cabling
- Automotive
- Energy sector
- Building and construction sector

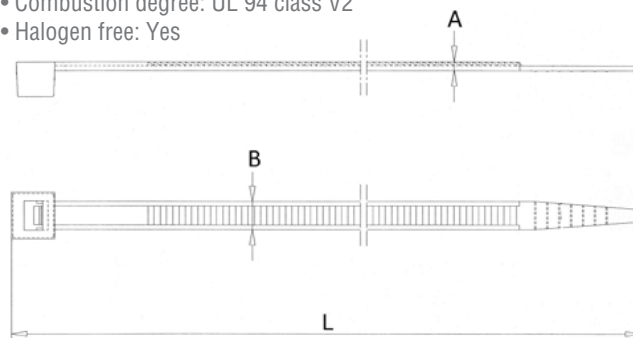

Box content

Product Code	Size			Colour	Tighten Range	Max Tensile Strength	Quantity In a Nylon Bag	Quantity In a Carton Box
	Length (L)	Width (B)	Strip Thickness (A)					
	mm	mm	mm					
TRK-100-25W	100	2.5	1.0	White	22	8	100	26.000
TRK-150-25W	150	2.5	1.0	White	35	8	100	20.000
TRK-200-25W	200	2.5	1.0	White	50	8	100	18.000
TRK-100-36W	100	3.5	1.2	White	22	18	100	12.000
TRK-140-36W	140	3.5	1.2	White	31	18	100	12.000
TRK-200-36W	200	3.5	1.2	White	50	18	100	10.000
TRK-250-36W	250	3.5	1.2	White	65	18	100	8.000
TRK-280-36W	280	3.5	1.2	White	74	18	100	8.000
TRK-300-36W	300	3.5	1.2	White	79	18	100	8.000
TRK-370-36W	370	3.5	1.2	White	98	18	100	6.000
TRK-200-48W	200	4.5	1.3	White	50	22	100	7.000
TRK-250-48W	250	4.5	1.3	White	65	22	100	6.000
TRK-300-48W	300	4.5	1.3	White	80	22	100	5.000
TRK-370-48W	370	4.5	1.3	White	98	22	100	4.000
TRK-430-48W	430	4.5	1.3	White	120	22	100	3.000
TRK-200-76W	200	7.5	1.5	White	50	55	100	4.000
TRK-300-76W	300	7.5	1.5	White	75	55	100	3.000
TRK-370-76W	370	7.5	1.5	White	98	55	100	2.500
TRK-450-76W	450	7.5	1.5	White	120	55	100	2.000
TRK-550-76W	550	7.5	1.5	White	155	55	100	1.500
TRK-750-76W	750	7.5	1.5	White	220	55	100	1.200
TRK-600-90W	600	9.0	1.6	White	165	80	100	1.200
TRK-710-90W	710	9.0	1.6	White	205	80	100	1.200
TRK-760-90W	760	9.0	1.6	White	220	80	100	1.200
TRK-900-90W	900	9.0	1.6	White	260	80	100	1.200
TRK-1200-90W	1200	9.0	1.6	White	370	80	100	1.000