Colored Cable Ties

Cable Ties

Application Areas

Industrial cabling

Automotive

Electricity Industry

· Building and construction sector

Tork colored cable ties are produced from Polyamide 6.6 material, which is known as the most durable among plastics. It has high strength and hardness thanks to its semi-crystalline structure. Thanks to these structural features, Tork standard cable ties are the most suitable material to work with under load due to their very high bending and tensile strength and low friction coefficient.

Tork colored cable ties are used to distinguish and identify circuits and power lines with different colors. Tork colored cable ties, which are also used in personal applications, are used in many different areas of life such as decoration, wiring, home electronics.

- Only high quality plastic that can be recycled in nature is used
- · Wide variety of materials, sizes and colors
- High tensile strength with low application force
- Serrated inner surface to grip the application area more tightly
- Edge surface slope for easy application
- Easy application manually or with apparatus

Technical Specifications


- Raw material: Polyamide 6.6
- Moisture Absorption: 2.7% (50% relative humidity)
- Working temperature: -40 ° C + 85 ° C
- Energy sector \bullet Application temperature: -10 ° C + 60 ° C
- Combustion degree: UL 94 class HB



Certifications

Reach, Rohs, Halogen free,



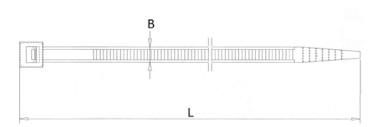

Box content

Product Code	Size							
	Length (L)	Width (B)	Strip Thickness (A)	Colour	Tighten Range	Max Tensile Strength	Quantity In a Nylon Bag	Quantity In a Carton Box
	mm	mm	mm		max ø mm	Kg/f		
TRK-100-25W	100	2.5	1.0	Colourful	22	8	100	26.000
TRK-150-25W	150	2.5	1.0	Colourful	35	8	100	20.000
TRK-200-25W	200	2.5	1.0	Colourful	50	8	100	18.000
TRK-100-35W	100	3.5	1.2	Colourful	22	18	100	12.000
TRK-200-36W	140	3.5	1.2	Colourful	31	18	100	12.000
TRK-200-36W	200	3.5	1.2	Colourful	50	18	100	10.000
TRK-250-36W	250	3.5	1.2	Colourful	65	18	100	8.000
TRK-280-36W	280	3.5	1.2	Colourful	74	18	100	8.000
TRK-370-36W	370	3.5	1.2	Colourful	98	18	100	6.000
TRK-200-48W	200	4.5	1.3	Colourful	50	22	100	7.000
TRK-250-48W	250	4.5	1.3	Colourful	65	22	100	6.000
TRK-300-48W	300	4.5	1.3	Colourful	80	22	100	5.000
TRK-370-48W	370	4.5	1.3	Colourful	98	22	100	4,000
TRK-430-48W	430	4.5	1.3	Colourful	120	22	100	3.000
TRK-200-75W	200	7.5	1,5	Colourful	46	55	100	4000
TRK-300-76W	300	7.5	1.5	Colourful	75	55	100	3.000
TRK-370-76W	370	7.5	1.5	Colourful	98	55	100	2.500
TRK-450-76W	450	7.5	1.5	Colourful	120	55	100	2.000
TRK-550-76W	550	7.5	1.5	Colourful	155	55	100	1.500
TRK-750-76W	750	7.5	1.5	Colourful	220	55	100	1.200
TRK-600-90W	600	9.0	1.6	Colourful	165	80	100	1.200
TRK-710-90W	710	9.0	1.6	Colourful	205	80	100	1.200
TRK-760-90W	760	9.0	1.6	Colourful	220	80	100	1.200
TRK-900-90W	900	9.0	1.6	Colourful	260	80	100	1.200
TRK-1200-90W	1200	9.0	1.6	Colourful	370	80	100	1.200